

# CEMPLATE

## METALLIC FLOOR HARDENER



### DESCRIPTION

**CEMPLATE** is a dry shake, metallic floor hardener with cleaned and graded iron aggregate in a high strength cementitious binder. CEMPLATE is designed to be incorporated into fresh concrete slabs and provides a dense, tough surface capable of withstanding the abrasion and impact loading which is required of floor slabs in numerous industrial and manufacturing facilities.

### FEATURES & BENEFITS

- Provides a high strength wearing surface.
- Gives up to 8 times the abrasion resistance of plain, cured concrete.
- Iron aggregate is free of rust, oil, and non-ferrous materials.
- Dense surface resists penetration of oil, grease, and many other liquids.
- Virtually non-dusting in service.
- Easy to clean and maintain.
- Economical to own over the life of the floor.

### BASIC USES

- Industrial floors
- Warehouses
- Processing plants
- Passenger and freight terminals
- Loading docks
- Heavy Industries

### DIRECTIONS FOR USE

The contractor and engineer are encouraged to consult and review the CMCI

“**Application Instructions - Dry Shake Floor Hardeners**”. The document offers instructions detailing the general installation of dry shake floor hardeners.

**Curing and Sealing** - The following products are recommended for curing and sealing CEMPLATE. Each has its own advantages and unique properties. The individual technical data sheet for each curing and sealing product should be consulted. In case of difficulty please contact the local CMCI representative for recommendations regarding specific projects.

### CURING

Solvent Based  
KUREKOTE DR \*  
V.O.C. Compliant  
KUREKOTE 75 VOX

### SEALING

Solvent Based  
CEMTEC FLOOR SEALER  
V.O.C. Compliant  
CEMTEC SIL-HARD\*

\* If the floor surface will later be frequently exposed to solvents, hydraulic fluid, etc., cure the floor with KUREKOTE DR applied at 9.8 - 12.3 m. After 6 weeks and exposure to traffic and sunlight, the KUREKOTE DR may be removed with mechanical scrubbers.

Seal the floor with CEMTEC SIL-HARD - 9.8 m<sup>2</sup>/ liter. Consult the individual product data sheets for suitability and application information.

### TECHNICAL INFORMATION


Typical Engineering Data

#### Compressive Strength ASTM C 109 50 mm cubes

Age	Strength
1 day	4,000 psi (27.6 MPa)
3 days	5,000 psi (34.5 MPa)
7 days	7,000 psi (48.3 MPa)
14 days	9,000 psi (62.1 MPa)
28 days	10,000 psi (69.0 MPa)

#### RELATIVE ABRASION RESISTANCE ASTM C 779 MAXIMUM RANGES

% of Reference

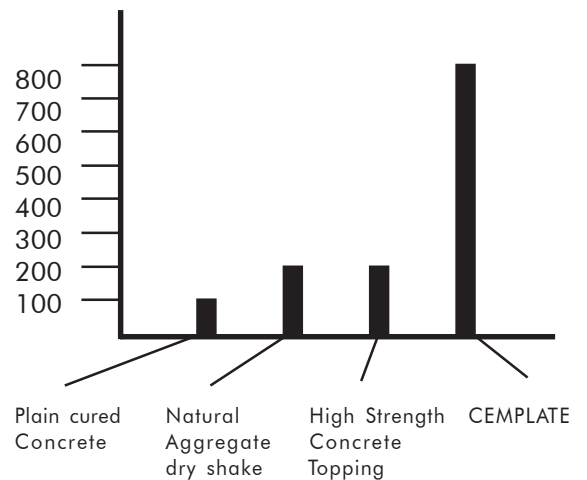

<b>COVERAGE</b>	CEMPLATE may be used in the range of 3.6 - 7.3 kg/m <sup>2</sup> . The higher the application rate, the better the abrasion resistance. Greater application rates may be used following consultation with CMCI Technical Department.
<b>PACKAGING</b>	Available in 25 Kg bags.
<b>COLOR</b>	Contact CMCI tech dept.

## CLEAN-UP

Clean tools and equipment with water before the material hardens.

## PRECAUTIONS / LIMITATIONS

- Proper curing and sealing is required.
- Sufficient manpower is a must - approximately 1 finisher and 1 laborer per 74-93m is necessary to place and finish concrete with a dry shake floor hardener
- Air-entraining admixtures may complicate finishing operations. Air content must be limited to not more than 3%.
- Not recommended for floors subjected to acids or other corrosive chemicals.

### Quality Statement

CMCI manufactures its products at their manufacturing facility in Saudi Arabia as per the Quality Procedures certified to conform with quality Management System described in ISO 9000 series

CMCI provides a comprehensive technical support system for its full range of high performance construction products CMCI also offers full technical field support to consultants, Architects, contractors, applicators and End Users.

The Technical Specification information and recommendations given are based on the current technical knowledge and the user or his representative is recommended to check the suitability of the product CMCI reserves the right to amend the technical characteristic of the product as part of ongoing research and development. As the work execution is beyond the direct and continuous control of CMCI no guaranty and or responsibility is assumed on the performance of work completion executed with use of our products.

**"High Quality Construction Chemicals"**  
CONSTRUCTION MATERIAL CHEMICAL INDUSTRIES  
P.O. Box 7137, Dammam 31462, Saudi Arabia,  
Tel: 00966-13-8471450; Fax: 00966-13-8471575  
Email: tech@cmci-sa.com, Web: www.cmci-sa.com